



"The Diamond of the Industry"


Liquid Tight Connectors with Stainless Steel Mesh Grips

- Prevents pullout from motion, strain and stress
- Multi-weave stainless steel mesh
- Suitable for hazardous locations, Class I, Div. 2;
Class II, Div. 1&2; Class III, Div. 1&2
- Sealing washer and locknut included
- Includes insulated throat
- Reusable

Straight Connectors

Cat. #	Size	Std Pkg	WT/ 100
STR38GT	3/8"	10	15
STR50GT	1/2"	10	20
STR75GT	3/4"	10	25
STR100GT	1"	10	35
STR125GT	1-1/4"	2	60
STR150GT	1-1/2"	2	85
STR200GT	2"	2	130

*Larger sizes available upon request

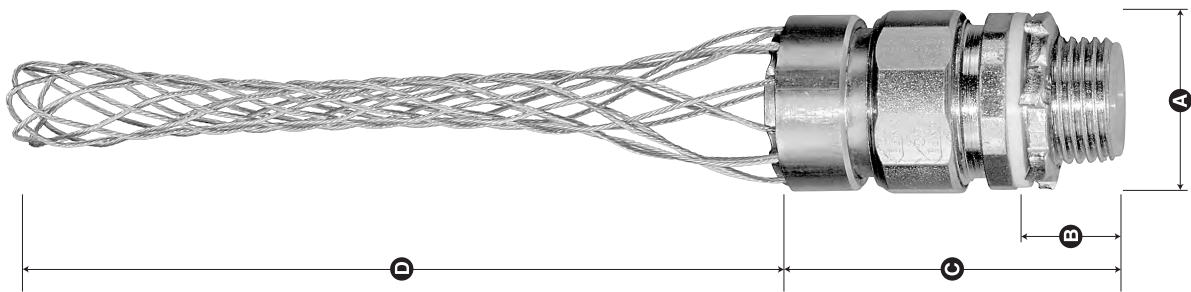

Dimensional Table

Cat. #	A Diameter	B Length of Thread	C Connector Length	D Mesh Length
STR38GT	1.06	.59	1.43	6.00
STR50GT	1.19	.59	1.43	5.25
STR75GT	1.38	.59	1.56	6.50
STR100GT	1.69	.66	1.69	7.75
STR125GT	2.06	.63	2.03	10.63
STR150GT	2.38	.63	2.22	11.00
STR200GT	2.88	.66	2.28	14.00

