




"The Diamond of the Industry"

Strain Relief Aluminum Cord Connectors

- Industrial specification grade, screwmachined aluminum
- Provides a UL liquid tight and strain relief termination for Flexible type, neoprene, vinyl, or PVC control cord and cable
- Color-coded grommet to indicate cable diameter range

UL rated suitable for hazardous locations
Class I, Div. 2; Class II, Div. 1 and 2;
Class III, Div. 1 and 2; NEC 501-4(b), 505-4 (a), 503-3(a)

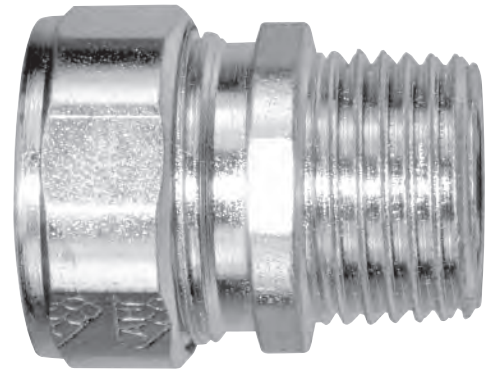

Straight Connectors

Cat. #	Color	Size	Cable Ranges		Unit Ctn	Std Pkg	WT/ 100
			Min.	Max			
CG50A250AL	Red	1/2"	.150	.250	25	250	6
CG50A350AL	White	1/2"	.250	.350	25	250	6
CG50A450AL	Blue	1/2"	.350	.460	25	250	6
CG50A560AL	Green	1/2"	.450	.560	25	250	6
CG50A650AL	Brown	1/2"	.560	.650	25	250	6
CG75A250AL	Red	3/4"	.150	.250	10	100	8
CG75A350AL	White	3/4"	.250	.350	10	100	8
CG75A450AL	Blue	3/4"	.350	.460	10	100	8
CG75A560AL	Green	3/4"	.450	.560	10	100	8
CG75A650AL	Brown	3/4"	.560	.650	10	100	8
CG75B750AL	Yellow	3/4"	.650	.750	10	100	10
CG75B850AL	Purple	3/4"	.750	.850	10	100	10
CG100B560AL	Green	1"	.450	.560	5	50	11
CG100B650AL	Brown	1"	.560	.650	5	50	11
CG100B750AL	Yellow	1"	.650	.750	5	50	11
CG100B850AL	Purple	1"	.750	.850	5	50	11
CG100C950AL	Grey	1"	.850	.950	5	50	11
CG100C1050AL	Black	1"	.950	1.050	5	50	11

Catalog pg 8A 03.2011

Flexible Cord