



"The Diamond of the Industry"

The ALUMINUM SPECTRIUM® System of High Quality Colored Cord Grips

- Designed for more corrosive environments
- Resistant to moisture and most normal and hazardous atmospheric conditions
- Bright & polished appearance
- Color coded grommet and sealing washer indicating cable diameter ranges
- Provides a UL liquid tight and strain relief termination for flexible type, neoprene, vinyl, or PVC control cord and cable
- Pocket size color-coded sizing chart included
- Includes UL & CSA listed conduit locknut

UL rated suitable for hazardous locations
Class I, Div. 2; Class II, Div. 1 and 2;
Class III, Div. 1 and 2; NEC 501-4(b), 505-4
(a), 503-3(a)



Straight Connectors

Cat. #	Color	Size	Cable Ranges		Unit Ctn	Std Pkg	WT/ 100
			Min.	Max.			
CG1AL	Red	1/2"	.150	.250	25	250	6
CG2AL	White	1/2"	.250	.350	25	250	6
CG3AL	Blue	1/2"	.350	.450	25	250	6
CG4AL	Green	1/2"	.450	.560	25	250	6
CG5AL	Brown	1/2"	.560	.650	25	250	6
CG6AL	Red	3/4"	.150	.250	10	100	8
CG7AL	White	3/4"	.250	.350	10	100	8
CG8AL	Blue	3/4"	.350	.450	10	100	8
CG9AL	Green	3/4"	.450	.560	10	100	8
CG10AL	Brown	3/4"	.560	.650	10	100	8
CG11AL	Yellow	3/4"	.650	.750	10	100	10
CG12AL	Purple	3/4"	.750	.850	10	100	10



"The Diamond of the Industry"


Selection Table for SPECTRUM® Cords

Cat. #	Size	Cable Ranges For Types			S, SO, ST & STO	For Types SJ, STO, SJT, SJTO, SVO, and Bus Drop
		Min.	Max.			
CG1	1/2"	.150	.250			18-2,3 SVO
CG2	1/2"	.250	.350			18-2,3 SJT, 18-2,3,4 SJO 16-2,3, SJO
CG3	1/2"	.350	.450	18-2,3,4	16-2,3,4	16-4 SJO 14-2,3,4 SJO 12-2 SJO 14-3 Bus Drop
CG4	1/2"	.450	.560	18-5,6,7	16-5,6 14-2,3	12-3 SJO 12-3 & 10-3 Bus Drop
CG5	1/2"	.560	.650	18-8,10	16-7,8 14-4 12-2,3 10-2	
CG6	3/4"	.150	.250			18-2,3 SVO
CG7	3/4"	.250	.350			18-2,3 SJT 18-2,3,4 SJO 16-2,3 SJO
CG8	3/4"	.350	.450	18-2,3,4	16-2,3,4	16-4 SJO 14-2,3,4 SJO 12-2 SJO 14-3 Bus Drop
CG9	3/4"	.450	.560	18-5,6,7	16-5,6 14-2,3	12-3 SJO 12-3 & 10-3 Bus Drop
CG10	3/4"	.560	.650	18-8,10	16-7,8 14-4 12-2,3 10-2	
CG11	3/4"	.650	.750	18-12,14	16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	8-3 Bus Drop
CG12	3/4"	.750	.850	18-16,18,20	16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	6-3 Bus Drop



"The Diamond of the Industry"

The SPECTRUM® System of High Quality Colored Cord Grips

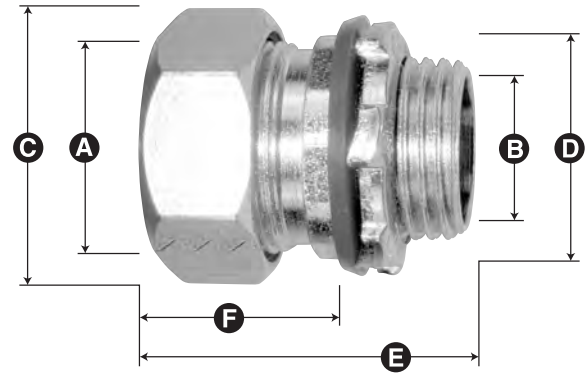

Straights[†] Dimensional Table

Cat. #	Size	A Cable Ranges Min. Max.	B Max Cable Core Dia.	C Cross Corner Gland Nut O.D.	D Hex Body O.D.	E Overall Length*	F Exposed Length*
CG1	1/2"	.150 .250	.640	1.210	.975	1-5/16"	13/16"
CG2	1/2"	.250 .350	.640	1.210	.975	1-5/16"	13/16"
CG3	1/2"	.350 .450	.640	1.210	.975	1-5/16"	13/16"
CG4	1/2"	.450 .560	.640	1.210	.975	1-5/16"	13/16"
CG5	1/2"	.560 .650	.640	1.210	.975	1-5/16"	13/16"
CG6	3/4"	.150 .250	.687	1.210	1.220	1-5/16"	13/16"
CG7	3/4"	.250 .350	.687	1.210	1.220	1-5/16"	13/16"
CG8	3/4"	.350 .450	.687	1.210	1.220	1-5/16"	13/16"
CG9	3/4"	.450 .560	.687	1.210	1.220	1-5/16"	13/16"
CG10	3/4"	.560 .650	.687	1.210	1.220	1-5/16"	13/16"
CG11	3/4"	.650 .750	.845	1.440	1.220	1-9/16"	1-1/32"
CG12	3/4"	.750 .850	.845	1.440	1.220	1-9/16"	1-1/32"